

Figure 1

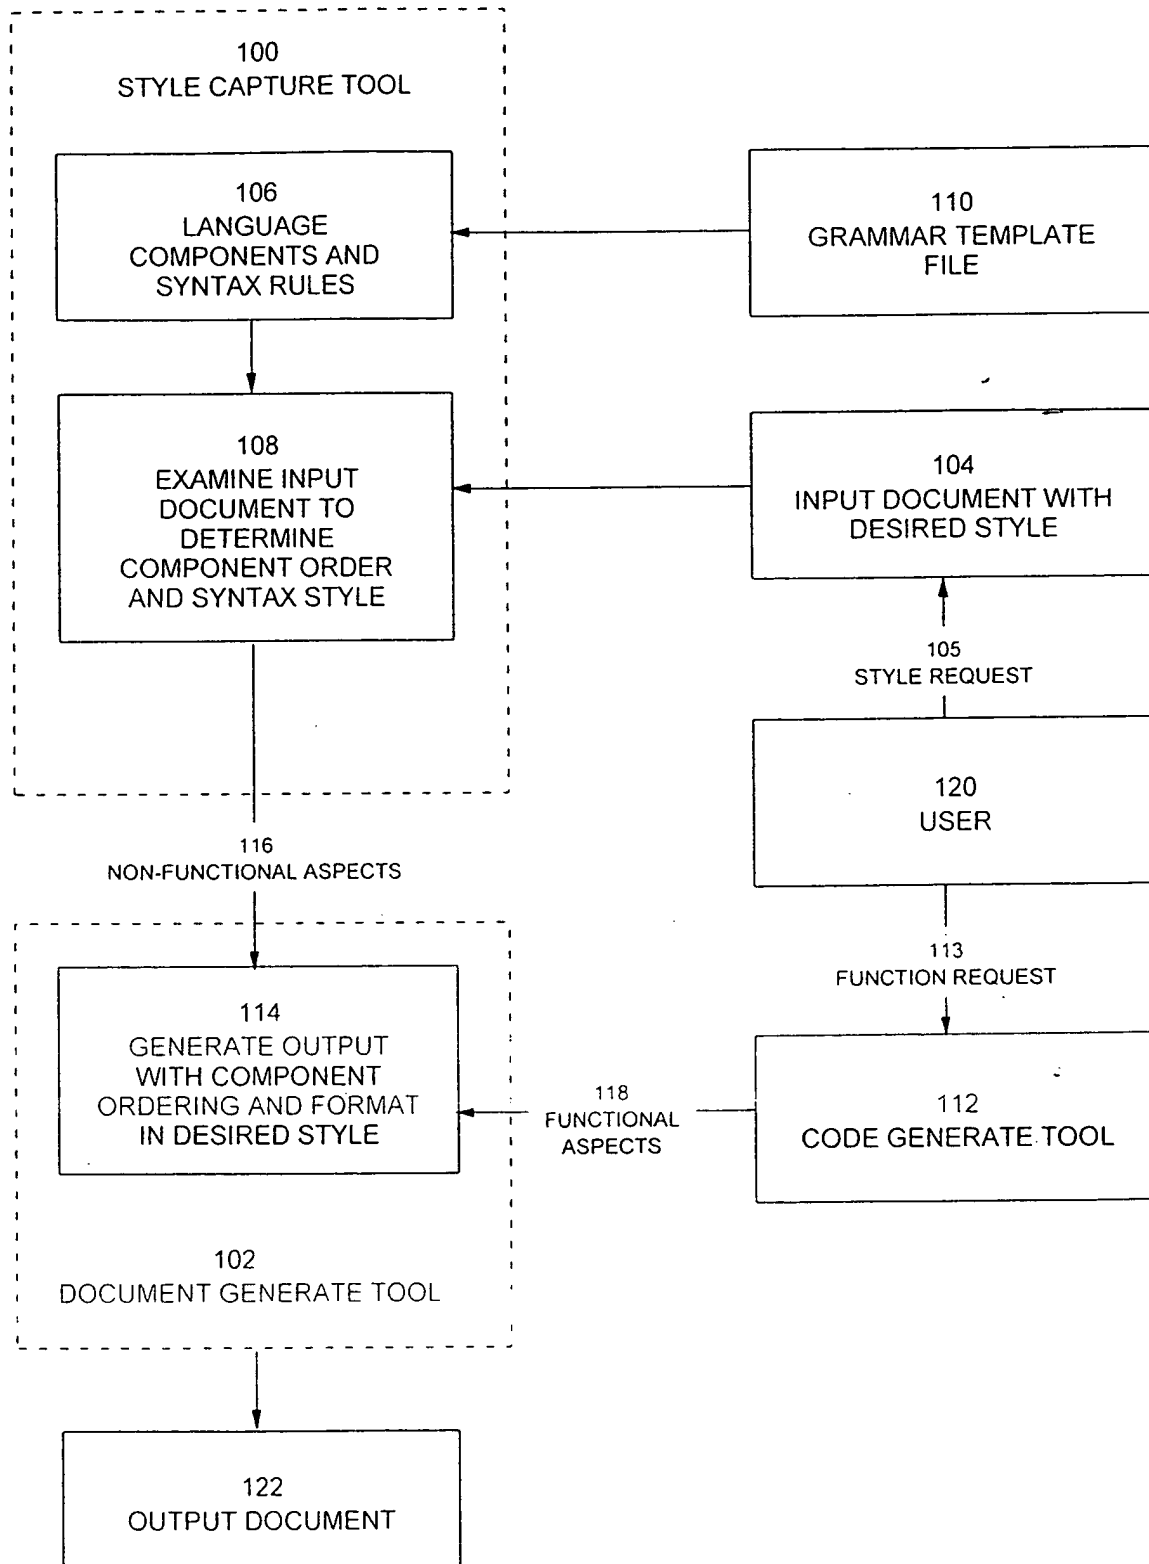


Figure 2

Class SmartGuide

DECLARATIONS

Here are the declarations that will be generated for you.  
You can go back if you have any changes to make.

File to write to:

D:\tests\new\FrameWindow.hpp

Browse ...

Edit Style ...

```
////////////////////////////////////
//
//  MyFrameWindow
//
////////////////////////////////////
class MyFrameWindow : public IFrameWindow
{
public IFrameHandler
public ICommandHandler
public IMenuHandler
{
public:
    MyFrameWindow();
    IColor backgroundColor() const;
    int get_aVariable();
    void set_aVariable(int value);

protected:
    IWindowHandle create (unsigned long id, const char * title
```

NAVIGATE

BACK

NEXT

OK

CANCEL

HELP

Figure 3

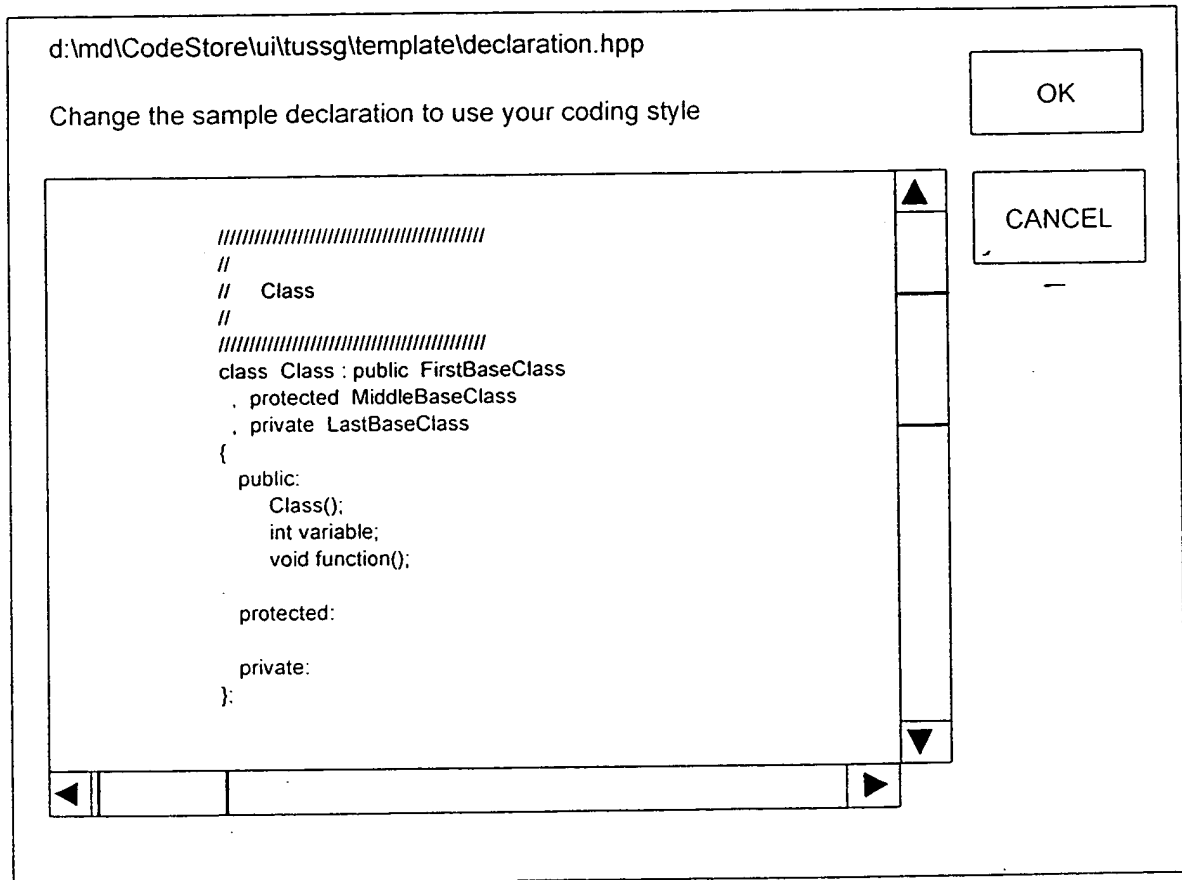


Figure 4

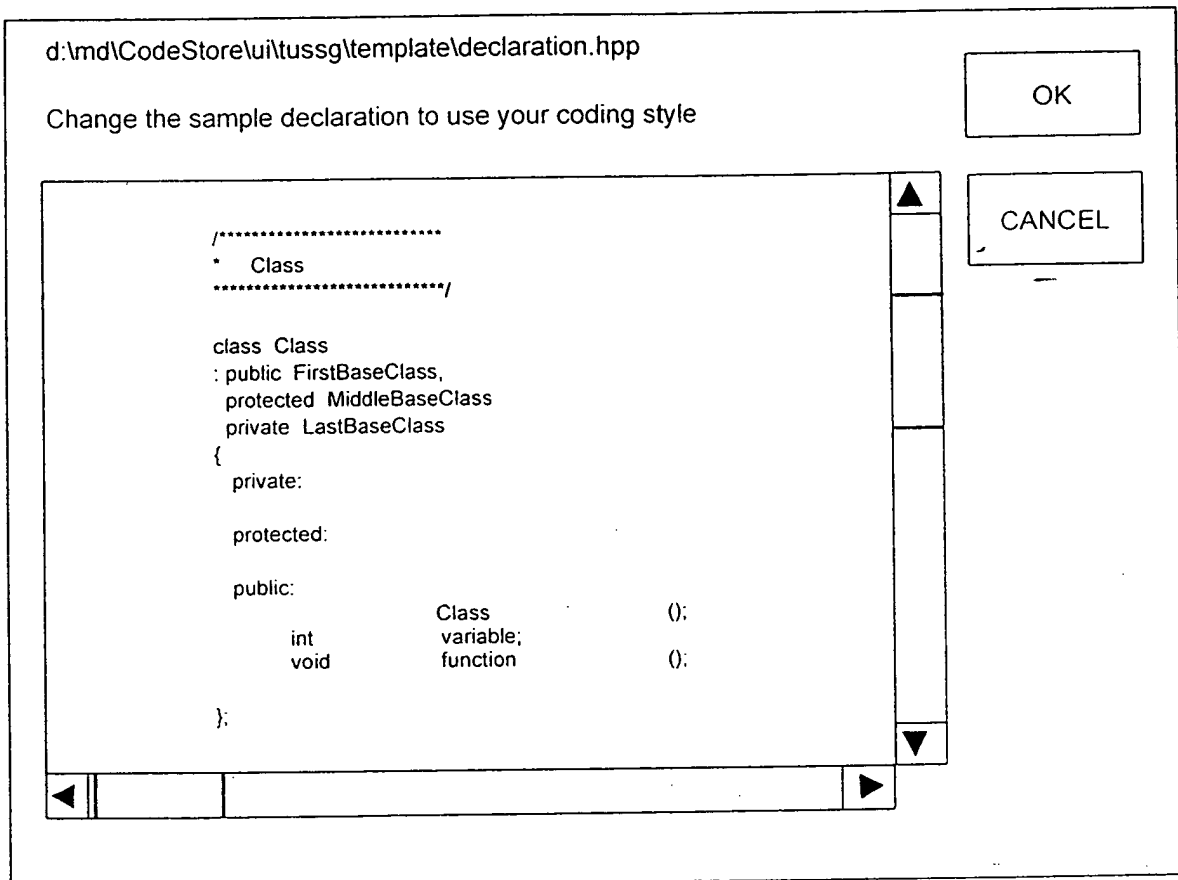


Figure 5

Class SmartGuide

DECLARATIONS

Here are the declarations that will be generated for you.  
You can go back if you have any changes to make.

File to write to:

D:\tests\newFrameWindow.hpp

Browse ...

Edit Style ...

MyFrameWindow

.....

class MyFrameWindow

: public IFrameWindow,

public IFrameHandler,

public ICommandHandler,

public IMenuHandler

{

private:

int \_aVariable;

protected:

IWindowHandle create (unsigned long id, con

public:

MyFrameWindow ();

IColor backgroundColor () const;

int get\_aVariable ();

void set\_aVariable (int value),

};

▲

▼

◀

▶

NAVIGATE

BACK

NEXT

OK

CANCEL

HELP